

Universal QuickPort® DIN Rail Module

APPLICATION

The Universal QuickPort DIN Rail Module offers a connection point in the cabling subsystem and is suitable for deployment in residential, industrial and enterprise structured cabling systems. The module easily snaps onto a DIN rail. Multiple modules can be aligned horizontally in a row and the angled direction of the jacks eases patch cord bending stresses while maximizing performance.



SPECIFICATION

Leviton Universal QuickPort DIN Rail Module shall provide fixed mounting of a single port to 35 mm EN60715 compliant DIN rail. The module shall be composed of a shuttered hinged housing and integrated bonding spring for maintaining shield integrity. Two side covers shall be included. Plastic components shall be composed of high impact plastic rated UL 94V-0. Modules shall be compatible with all Category rated QuickPort jacks and shall be gangable when mounted with adjoining side covers removed. Module shall be compliant with ANSI/TIA-568 standards.

FEATURES

- Compatiblewith Leviton-approved QuickPort data jacks and Plus Snap-In data jacks, both shielded and unshielded
- · Port protected with shutter door
- · Detachable side covers
- Tool-free installation
- · Integrated grounding clip
- · Label identification window
- All packaging is paper based and fully recyclable

DESIGN CONSIDERATIONS

- Attaches to EN60715 compliant DIN Rail (35 mm x 7.5 mm and 35 mm x 15 mm)
- Supports simplex SC and duplex LC fiber with 900 µm buffered fiber or jacketed Uni-boot (round) cordage when shutter door is removed

STANDARDS & REGULATIONS

- cULusListed(UL1863&CAN/CSA-C22.2 No. 182.4)
- ANSI/TIA-568

MECHANICAL SPECIFICATIONS

Dimensions: Width (covers removed): 0.71"

(18 mm)

Width (covers installed): 0.83"

(21 mm)

Depth: 2.73" (69.23 mm) Height: 2.78" (7.50 mm) High Impact Plastic rated

Materials: UL 94V-0

> Type 301 Stainless Steel (Bonding Spring/Clip)

-40°C to +70°C

Temperature (Storage): Temperature (Operating): -10°C to +60°C

COUNTRY OF ORIGIN

Taiwan

WARRANTY INFORMATION


ForLevitonproductwarranties,goto leviton.com/ns/warranty



Phone: 01 424 2414 Email: sales@rwlas.com

PRODUCT SPECIFICATIONS 42089-1DN



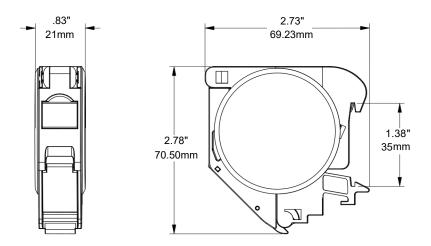

PART NUMBER	
Description	Part No.
Universal QuickPort® DIN Rail Module, gray	42089-1DN



Phone: 01 424 2414 Email: sales@rwlas.com